


Dowel drills with threaded shank with countersink



325-327-329-330

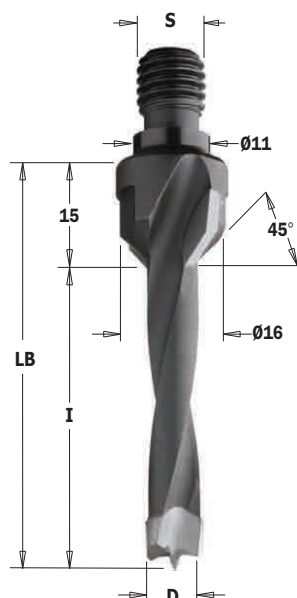

D mm	I mm	LB mm	S mm	ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation
5	20	35	M10/11x4	325.050.11	325.050.12
6	20	35	M10/11x4	325.060.11	325.060.12
8	20	35	M10/11x4	325.080.11	325.080.12
10	20	35	M10/11x4	325.100.11	325.100.12
12	20	35	M10/11x4	325.120.11	325.120.12
5	30	45	M10/11x4	327.050.11	327.050.12
6	30	45	M10/11x4	327.060.11	327.060.12
8	30	45	M10/11x4	327.080.11	327.080.12
10	30	45	M10/11x4	327.100.11	327.100.12
12	30	45	M10/11x4	327.120.11	327.120.12
5	40	55	M10/11x4	329.050.11	329.050.12
6	40	55	M10/11x4	329.060.11	329.060.12
8	40	55	M10/11x4	329.080.11	329.080.12
10	40	55	M10/11x4	329.100.11	329.100.12
12	40	55	M10/11x4	329.120.11	329.120.12
5	50	65	M10/11x4	330.050.11	330.050.12
6	50	65	M10/11x4	330.060.11	330.060.12
8	50	65	M10/11x4	330.080.11	330.080.12
10	50	65	M10/11x4	330.100.11	330.100.12
12	50	65	M10/11x4	330.120.11	330.120.12

TECHNICAL DETAILS:

- Super-strength steel
- HW head with precision balanced centre point
- 2 precision ground cutting edges [Z2]
- 2 spiral flutes
- 2 ground spurs [V2]

APPLICATION: used on boring machines equipped with chucks.

Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank without countersink



338-339-340



D mm	I mm	LB mm	S mm	ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation
5	30	45	M10/11x4	338.050.11	338.050.12
6	30	45	M10/11x4	338.060.11	338.060.12
8	30	45	M10/11x4	338.080.11	338.080.12
10	30	45	M10/11x4	338.100.11	338.100.12
12	30	45	M10/11x4	338.120.11	338.120.12
5	40	55	M10/11x4	339.050.11	339.050.12
6	40	55	M10/11x4	339.060.11	339.060.12
8	40	55	M10/11x4	339.080.11	339.080.12
10	40	55	M10/11x4	339.100.11	339.100.12
12	40	55	M10/11x4	339.120.11	339.120.12
5	50	65	M10/11x4	340.050.11	340.050.12
6	50	65	M10/11x4	340.060.11	340.060.12
8	50	65	M10/11x4	340.080.11	340.080.12
10	50	65	M10/11x4	340.100.11	340.100.12
12	50	65	M10/11x4	340.120.11	340.120.12


TECHNICAL DETAILS:

- Super-strength steel
- HW head with precision balanced centre point
- 2 precision ground cutting edges [Z2]
- 2 ground spurs [V2]
- 4 spiral flutes

APPLICATION: used on boring machines equipped with chucks.

Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank with countersink

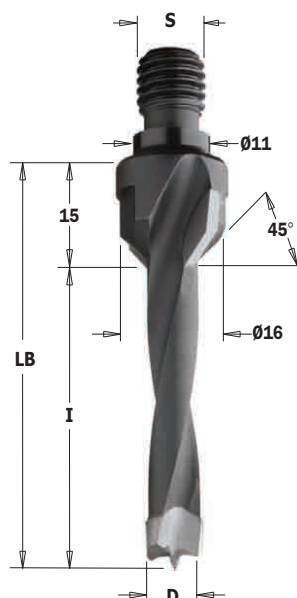

325-327-329-330



D mm	I mm	LB mm	S mm	ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation
5	20	35	M10/11x4	325.050.11	325.050.12
6	20	35	M10/11x4	325.060.11	325.060.12
8	20	35	M10/11x4	325.080.11	325.080.12
10	20	35	M10/11x4	325.100.11	325.100.12
12	20	35	M10/11x4	325.120.11	325.120.12
5	30	45	M10/11x4	327.050.11	327.050.12
6	30	45	M10/11x4	327.060.11	327.060.12
8	30	45	M10/11x4	327.080.11	327.080.12
10	30	45	M10/11x4	327.100.11	327.100.12
12	30	45	M10/11x4	327.120.11	327.120.12
5	40	55	M10/11x4	329.050.11	329.050.12
6	40	55	M10/11x4	329.060.11	329.060.12
8	40	55	M10/11x4	329.080.11	329.080.12
10	40	55	M10/11x4	329.100.11	329.100.12
12	40	55	M10/11x4	329.120.11	329.120.12
5	50	65	M10/11x4	330.050.11	330.050.12
6	50	65	M10/11x4	330.060.11	330.060.12
8	50	65	M10/11x4	330.080.11	330.080.12
10	50	65	M10/11x4	330.100.11	330.100.12
12	50	65	M10/11x4	330.120.11	330.120.12

TECHNICAL DETAILS:

- Super-strength steel
- HW head with precision balanced centre point
- 2 precision ground cutting edges [Z2]
- 2 spiral flutes
- 2 ground spurs [V2]

APPLICATION: used on boring machines equipped with chucks.

Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank without countersink



338-339-340



D mm	I mm	LB mm	S mm	ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation
5	30	45	M10/11x4	338.050.11	338.050.12
6	30	45	M10/11x4	338.060.11	338.060.12
8	30	45	M10/11x4	338.080.11	338.080.12
10	30	45	M10/11x4	338.100.11	338.100.12
12	30	45	M10/11x4	338.120.11	338.120.12
5	40	55	M10/11x4	339.050.11	339.050.12
6	40	55	M10/11x4	339.060.11	339.060.12
8	40	55	M10/11x4	339.080.11	339.080.12
10	40	55	M10/11x4	339.100.11	339.100.12
12	40	55	M10/11x4	339.120.11	339.120.12
5	50	65	M10/11x4	340.050.11	340.050.12
6	50	65	M10/11x4	340.060.11	340.060.12
8	50	65	M10/11x4	340.080.11	340.080.12
10	50	65	M10/11x4	340.100.11	340.100.12
12	50	65	M10/11x4	340.120.11	340.120.12


TECHNICAL DETAILS:

- Super-strength steel
- HW head with precision balanced centre point
- 2 precision ground cutting edges [Z2]
- 2 ground spurs [V2]
- 4 spiral flutes

APPLICATION: used on boring machines equipped with chucks.

Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank with countersink

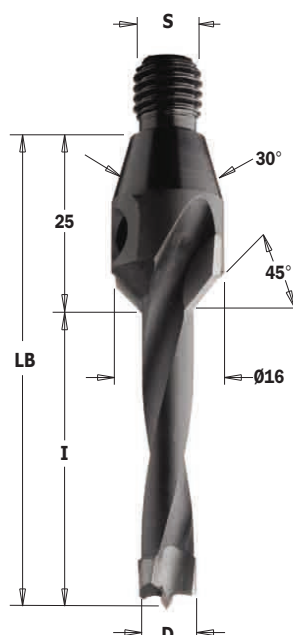
332-334-336-337
HW Z2 V2 RH LH

D mm	I mm	LB mm	S mm	ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation
5	20	45	M10/30°	332.050.11	332.050.12
6	20	45	M10/30°	332.060.11	332.060.12
8	20	45	M10/30°	332.080.11	332.080.12
10	20	45	M10/30°	332.100.11	332.100.12
12	20	45	M10/30°	332.120.11	332.120.12
5	30	55	M10/30°	334.050.11	334.050.12
6	30	55	M10/30°	334.060.11	334.060.12
8	30	55	M10/30°	334.080.11	334.080.12
10	30	55	M10/30°	334.100.11	334.100.12
12	30	55	M10/30°	334.120.11	334.120.12
5	40	65	M10/30°	336.050.11	336.050.12
6	40	65	M10/30°	336.060.11	336.060.12
8	40	65	M10/30°	336.080.11	336.080.12
10	40	65	M10/30°	336.100.11	336.100.12
12	40	65	M10/30°	336.120.11	336.120.12
5	50	75	M10/30°	337.050.11	337.050.12
6	50	75	M10/30°	337.060.11	337.060.12
8	50	75	M10/30°	337.080.11	337.080.12
10	50	75	M10/30°	337.100.11	337.100.12
12	50	75	M10/30°	337.120.11	337.120.12


TECHNICAL DETAILS:

- Super-strength steel
- HW head with precision balanced centre point
- 2 precision ground cutting edge [Z2]
- 2 ground spurts [V2]
- 2 spiral flutes

APPLICATION: used on boring machines equipped with chucks.

Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank without countersink

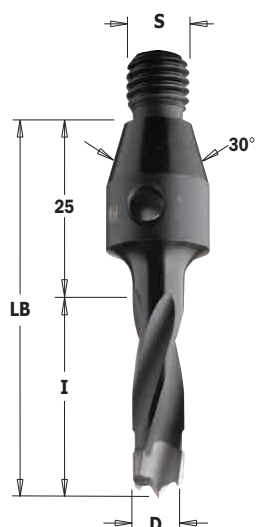
341-342-343
HW Z2 V2 RH LH

D mm	I mm	LB mm	S mm	ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation
5	30	55	M10/30°	341.050.11	341.050.12
6	30	55	M10/30°	341.060.11	341.060.12
8	30	55	M10/30°	341.080.11	341.080.12
10	30	55	M10/30°	341.100.11	341.100.12
12	30	55	M10/30°	341.120.11	341.120.12
5	40	65	M10/30°	342.050.11	342.050.12
6	40	65	M10/30°	342.060.11	342.060.12
8	40	65	M10/30°	342.080.11	342.080.12
10	40	65	M10/30°	342.100.11	342.100.12
12	40	65	M10/30°	342.120.11	342.120.12
5	50	75	M10/30°	343.050.11	343.050.12
6	50	75	M10/30°	343.060.11	343.060.12
8	50	75	M10/30°	343.080.11	343.080.12
10	50	75	M10/30°	343.100.11	343.100.12
12	50	75	M10/30°	343.120.11	343.120.12


TECHNICAL DETAILS:

- Super-strength steel
- HW head with precision balanced centre point
- 2 precision ground cutting edges [Z2]
- 2 ground spurts [V2]
- 4 spiral flutes

APPLICATION: used on boring machines equipped with chucks.

Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank

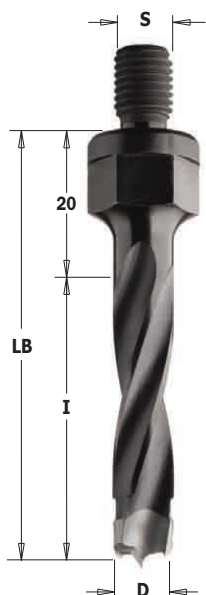

344



D mm	I mm	LB mm	S mm	ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation
5	43	63	M8	344.050.11	344.050.12
6	43	63	M8	344.060.11	344.060.12
8	43	63	M8	344.080.11	344.080.12
10	43	63	M8	344.100.11	344.100.12
12	43	63	M8	344.120.11	344.120.12

FOR USE ON THE FOLLOWING MACHINES:
Nottmeyer (older models)

346



D mm	I mm	LB mm	S mm	ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation
5	43	63	M10	346.050.11	346.050.12
6	43	63	M10	346.060.11	346.060.12
8	43	63	M10	346.080.11	346.080.12
10	43	63	M10	346.100.11	346.100.12
12	43	63	M10	346.120.11	346.120.12

FOR USE ON THE FOLLOWING MACHINES:
Ayen, Holzma, Knoevenagel, Mayer, Torwegge

TECHNICAL DETAILS:

- Super-strength steel
- HW head with precision balanced centre point
- 2 precision ground cutting edges [Z2]
- 2 ground spurs [V2]
- 4 spiral flutes

APPLICATION: used on boring machines equipped with chucks.
Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.

Dowel drills with threaded shank



352-353



D mm	I mm	LB mm	S mm	ORDER NO. Right-hand rotation	ORDER NO. Left-hand rotation
5	30	45	M8/9	352.050.11	352.050.12
6	30	45	M8/9	352.060.11	352.060.12
8	30	45	M8/9	352.080.11	352.080.12
10	30	45	M8/9	352.100.11	352.100.12
12	30	45	M8/9	352.120.11	352.120.12

5	40	55	M8/9	353.050.11	353.050.12
6	40	55	M8/9	353.060.11	353.060.12
8	40	55	M8/9	353.080.11	353.080.12
10	40	55	M8/9	353.100.11	353.100.12
12	40	55	M8/9	353.120.11	353.120.12

FOR USE ON THE FOLLOWING MACHINES:
Masterwood (Zangheri & Boschetti)
Morbideili, Nottmeyer (new design)

TECHNICAL DETAILS:

- Super-strength steel
- HW head with precision balanced centre point
- 2 precision ground cutting edges [Z2]
- 2 ground spurs [V2]
- 4 spiral flutes

APPLICATION: used on boring machines equipped with chucks.
Used to drill blind holes in solid wood, wood composites, plastic and laminated materials.